



NS Semicon LED LINEUP


2012.05.22
NS Semicon 株式会社

B' sKit/Flat Panel / 埋込み型




	型番	W	対応電圧 (V)	全光束 (lm)	演色性	色温度 (K)	サイズ (mm)	価格	備考
	122S	54	100~240	4720	80+	2700/6500	300 x 600 x 38		
	123S	72	100~240	5533	80+	2700~6500	300 x 600 x 38		
	222S	108	100~240	9440	80+	2700~6500	600 x 600 x 38		
	223S	144	100~240	11066	80+	2700~6500	600 x 600 x 38		

事務室

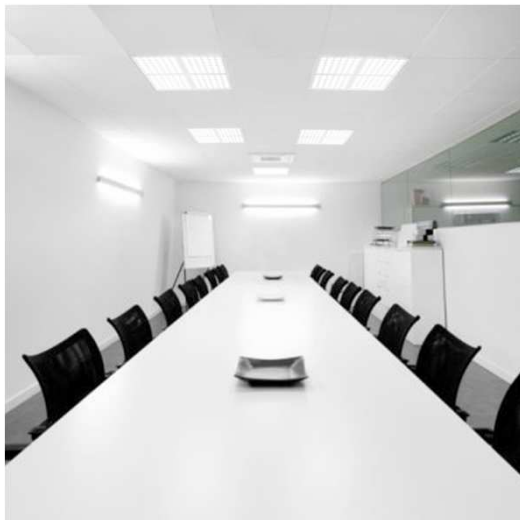

事務室

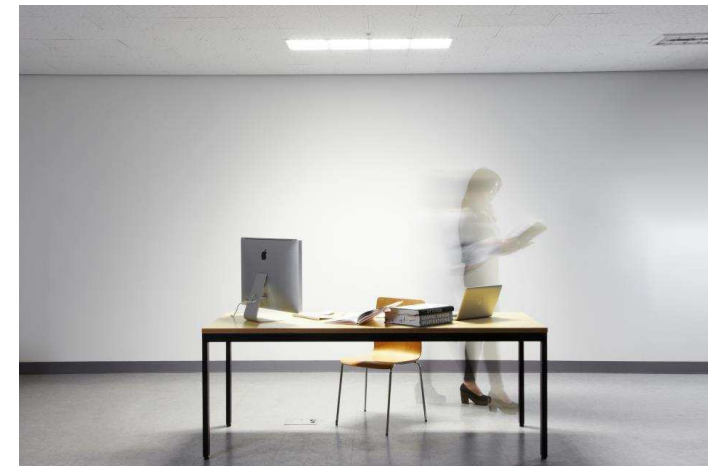

導入実績

大型照明 / 看板灯・投光器等



	型番	サイズ (mm)	W	色温度 (K)	全光束 (lm)	照射角 (°)	対応電圧 (V)	IP	価格	カテゴリ
	PHR36B29-56	360 x 290 x 206	56	3000/5700	4480	90	100~240	66		看板灯
	PHR36B29-80		80		6400					
	PHF12D-100K	Φ300 x 248	100	3000/6500	8500	20/40 60/80/ 120	100~240	66		丸型投光器
	PHF12D-120K		120		9600					
	PHF12D-140K		140		10500					
	PFL36B29-100K	360 x 290 x 206	100	3000/6500	8500	20/40 60/80/ 120	100~240	66		四角投光器
	PFL36B29-120K		120		9600					
	PFL36B29-140K		140		10500					
	PHF12-DR100	Φ415 x 607	100	3000/6500	8500	20/40 60/80/ 120	100~240	66		丸型投光器 (傘ケース付き)
	PHF12-DR120		120		9600					
	PHF12-DR140		140		10500					
	PFL36B29-200	614 x 476 x 159	200	3000/6500	17000	20/40 60/80/ 120	100~240	66		ツインライト 屋外用角型投光器
	PFL36B29-240		240		19200					
	PFL36B29-280		280		21000					

工場天井灯

駐車場

パチンコ店



導入実績

蛍光灯 / 電源内・外蔵タイプ、FPL灯



	型番	種類	サイズ (mm)	W	色温度 (K)	全光束 (lm)	照度 (lx/m)	対応電圧 (V)	口金	価格
	ULLD-18W-01	電源外付け型 蛍光灯	Φ26 x 1198	18	5700	2100	90	90~264	G13	
	ULLD-23W-01			21		2600	610			
	FL6-PI10-C	電源外付け型 蛍光灯	Φ26 x 580	10	5500	960	277	90~264	G13	
	FL12-PI21-C		Φ26 x 1198	21		2010	585			
	FL12-PI27-C		Φ26 x 1198	27	6500	819				
	FL24-PI44-C		Φ32 x 2400	44	5500	4020	624			
	FLI12-PB21C	電源内蔵型 蛍光灯	Φ26 x 1198	21	5500	1960	596	100~242	G13	
	FP-020410CEGYA	FPL灯	54 x 22 x 410	20	5700	1600	550	90~242	GY10q	
	FP-023410CEGYA		54 x 22 x 530	24		1920	680			

工場天井



老人ホーム/愛知県




導入実績

高天井灯タイプ / 口金E26,E39




	型番	W	対応電圧(V)	全光速 (lm)	照度 (lux/1m)	照射角 (°)	色温度 (K)	口金	IP	サイズ (mm)	重量 (Kg)	価格
	FLE035155-GPW-NCB	35	100~240	2400	1060	120	5000	E26	65	Φ155 x 154	0.95	
	FLE035155-GPW-NSB				1400	60				Φ155 x 168		
	FLE035155-GRW-NCB			2200	927	120	3000					
	FLE035155-GRW-NSB				1250	60						
	FLE035155-GPW-NCA	35	100~240	2400	1060	120	5000	E26	65	Φ155 x 168	0.97	
	FLE035155-GPW-NSA				1400	60						
	FLE035155-GRW-NCA			2200	927	120	3000					
	FLE035155-GRW-NCA				1250	60						
	IL045EK-P2E39	45	90~264	3100	1500	120	5500	E39	20	Φ204 x 201	1.1	
	IL045EK-W2E39			2750			3500					
	IL060U1	60	90~264	3600	1440	100	5500	E39	65	Φ241 x 250	2.3	
	HFA200M55-50RE39	85	90~295	5500	5700	50	5000	E39	65	Φ198 x 200	1.85	
	HFA250S90-52RE39	130	90~295	8500	9380	52	5000	E39	65	Φ250 x 245	2.7	

結婚式場

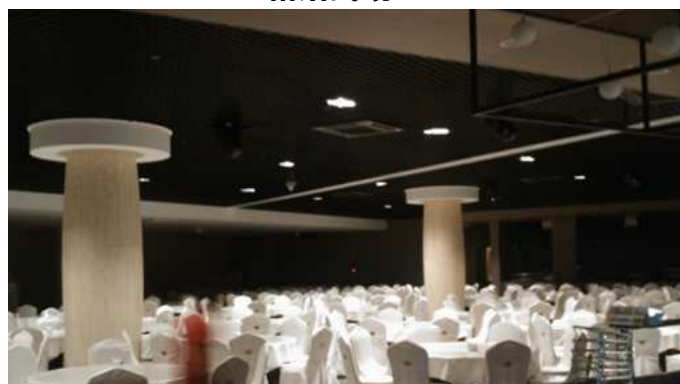

工場

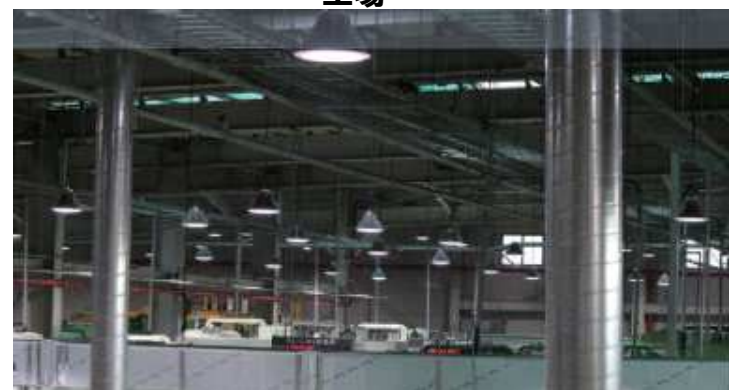

導入実績

ダウンライト / 埋込み (丸型、四角型)



	型番	サイズ(mm)	W	対応電圧 (V)	全光速 (lm)	照度 (lux/1m)	照射角 (°)	色温度 (K)	調光	価格	備考
	DLL-08PDU-WW40/60	3inch	8	100	280	450/300	40/60	3000	○		取付穴:φ75 調光可
	DLL-08PDU-CW40/60	φ90 x 82.4			340	550/340		5700	○		
	DLL-14PD-4WL/WB	4inch	10	110	630	502/229	70/100	3000	○		取付穴:φ100 調光可
	DLL-14PD-4CL/4CB	φ125 x 117			690	528/242		5700	○		
	DLL-20PD-5WL/5CL	5inch	14	110	860	681/314	70/100	3000	○		取付穴:φ125 調光可
	DLL-20PD-5CL/5CB	φ156 x 117			1010	806/372		5700	○		
	DLL-24PD-5WL/5WB	6inch	17	110	1050	837/378	70/100	3000	○		取付穴:φ150 調光可
	DLL-24PD-5CL/5CB	φ170 x 125			1200	897/414		5700	○		
	DLL-72P-WW120/CW120	8inch	45	90~245	2800/	1018/	120	3000/5700	X		取付穴:φ200
		φ230 x 109			3300	1210					
	PHC12-T56	10inch	56	100~240	4480	927	90	3000/5700	X		取付穴:φ300
	PHC12-T80	φ300 x 218	80		6400	3463			X		
	DD-20790	157x157x80	15	100~240	614	235	106	3000	X		四角ダウンライト 取付穴:138 x 138
					745	275		5000	X		
	DD-20800	200x200x80	20	100~240	906	328	110	3000	X		四角ダウンライト 取付穴:186 x 186
					1041	369		5000	X		
	DD-20810	220x220x80	22	100~240	1068	406	105	3000	X		四角ダウンライト 取付穴:202 x 202
					1184	452		5000	X		
	DD-20820	300x300x70	26	100~240	1506	560	108	3000	X		四角ダウンライト 取付穴:282 x 282
					1626	610		5000	X		

ホール



ショッピングセンター



導入実績

ダウンライト / 反射板器具



	型番	サイズ(mm)	W	対応電圧(V)	全光速(lm)	照度(lux/1m)	照射角(°)	色温度(K)	価格	備考
	DD-12030.01	3inch	8	100~240	328	2487	17	3000		Bridge luxチップ 安定器箱含み
	DD-12030.02	Φ88 x 70			328	543	117			
	DD-12010	4inch Φ110 x 97	15	100	953	1694/1431	33/39	5000		Philips LED Disk 安定器無し
	DD-20040	5inch Φ140 x 170	100	28	1779	1502	69	3000		Philips Fortimo LED DLM 安定器箱含み
				26	1730	1467	69	4000		
				26	1730(推定)	1500(推定)	69	5000		
	DD-20042			51	2507	2301	67	3000		
				47	2811	2461	68	4000		
				47	2800(推定)	2500(推定)	69	5000		
	DD-20010	6inch Φ172 x 152	100	28	1850	2609/1536	42/67	3000		Philips Fortimo LED DLM 安定器箱含み
				26	1721	2424/1423	42/67	4000		
				26	1720	2388/1405	42/67	5000		
	DD-20012			51	2802	4125/2373	40/66	3000		
				47	2843	4194/2478	40/66	4000		
				47	2800	4200/2500	40/66	5000		
	DD-20020	7inch Φ200 x 152	100	28	1926	3336/1687	30/59	3000		Philips Fortimo LED DLM 安定器箱含み
				26	1748	3053/1553	30/59	4000		
				26	1750	3055/1546	30/59	5000		
	DD-20022			51	2807	5113/2586	29/58	3000		
				47	2885	5245/2633	29/58	4000		
				47	2800	5250/2600	29/58	5000		

ロッテ百貨店



地下鉄駅



導入実績

バルブ型 / E210,E11,E17,E26



	型番	W	対応電圧 (V)	全光速 (lm)	照度 (lux/1m)	照射角 (°)	色温度 (K)	口金	サイズ (mm)	重量 (g)	価格	備考
	SF-BU-001001	3	110	230			2700~6500	E11/E17/E26	Φ37 x 82			ボール電球、調光可
	SF-CD-002002	3	85~285	170			2700~6500	E11/E17/E26	Φ37 x 106	48		Candle Light、調光可
	SMR005050 Series	5	AC/DC12	325/330/330 290/270/285	1910/260/140 1730/260/130	20/60/ 120	5000 3000	EZ10	Φ50 x 65	65		MR16 ハロゲン20-30W代替
		5	100~240	325/330/330 290/270/285	1910/260/140 1730/260/130	20/60/ 120	5000 3000	E11/E17	Φ50 x 65	65	(E11) (E17)	
	SMC005060 Series	5	AC/DC12	315 270	265/130 240/115	60/120	5000 3000	EZ10	Φ60 x 65	130		ミニコンパクト ハロゲン20-30W代替
		5	100~240	315 270	265/130 240/115	60/120	5000 3000	E11/E17	Φ60 x 65	130	(E11) (E17)	
	SMC008060 Series	8	100~240	460/437	350/177	60/120	5000	E26	Φ61 x 96	180		ミニコンパクト 白熱灯60W代替
				418/406	264/164		3000					
	SPS012095 Series	12	100~240	885/870/830 735/720/700	4755/735/375 4150/660/340	20/60/ 120	5000 3000	E26	Φ98 x 109	345		PAR30 ハロゲン75W代替
		20		90~245	860 1050	1450/940 1650/1050	40/60					
	3815 TDU	15	90~130	720/790	760/310	70/120	2850	E26	Φ116 x 155	841		PAR38 調光可
				900/980	930/370		5700					
	LED Bulb	7.5	100~130	450/550		120	2700/5000	E26	Φ60 x 119	127		電球型

ショッピングセンター



ショッピングセンター



導入実績

Flat Panel / 埋込み型



	型番	W	対応電圧 (V)	全光速 (lm)	照度 (lux/1m)	色温度 (K)	サイズ (mm)	価格	備考
	F030313	13	100~240	975	402	2700~6500	300 x 300 x 45		天つりType:1,000円追加
	F040438	38	100~240	2850	1175	2700~6500	450 x 450 x 45		
	F060659	59	100~240	4425	1700	2700~6500	600 x 600 x 45		
	F060659(調光)	59	100~240	4425	1700	2700~6500	600 x 600 x 45		

事務室



講義室



導入実績

その他 / Spot Light,保安灯、FPL灯等



	型番	W	対応電圧 (V)	全光速 (lm)	照度 (lux/1m)	照射角 (°)	色温度 (K)	口金	サイズ (mm)	価格	備考
	DDC-65010	22 23	100~240	1078 1445		10/15/20/ 30/40/50/60	3000 5000		155 x 147(Φ96)		Spot Light
	DDC-65110	34 32	100~240	2003 2404		15/20/30 40/50	3000 5000		98 x 312(Φ130)		Spot Light
	DDC-65210	15	100	893 905		37/43 33/40	2700 5000		Φ99 x 174		Spot Light
	DSPL207	60	100~240	4530			5500	E39	Φ127 x 258		保安灯 安定器別途設置
	IL007U1	7	90~264	400	165	120	5000	E26	Φ50 x 146		保安灯(角度調整可) 電源内蔵型
	IL035U1	35	100~220	2500	300	360	3000/ 5000	E26/E39	Φ80 x 265		保安灯 電源内蔵型

ギャラリー



街灯



導入実績